


Technical Data

1. Technical specifications		Length	800 mm	3. Standards	
Number of containers	1 pallet	Width	600 mm	Relative Air Humidity	≤98% not condensing
Capacity	500 kg	Height to platform	92 mm	Pollution degree	2
Overload Capacity	100%	Weight	13 kg	4. Delivery Condition	
Combined deviation (typical)	±0.5% f.s.	Indoor use		Ready to use	
Resolution	50 g	2. Interface		Delivered on 1/2 EUR-pallet, max. 10 pieces stacked per pallet	
Temperature drift (typical)	±60 g/K	2 wire RS-485 serial bus			
Zero point drift (typical)	+6 kg/year	LOWA DIGI SENS protocol (serial half-duplex ASCII protocol, no collision control)			
Power supply	12V DC ± 2V DC	Connector	RJ45 (8 pins)		
Power consumption	30 mA (360 mW)				
Functional temperature range	+5 to +40 °C				

Dimensional drawing

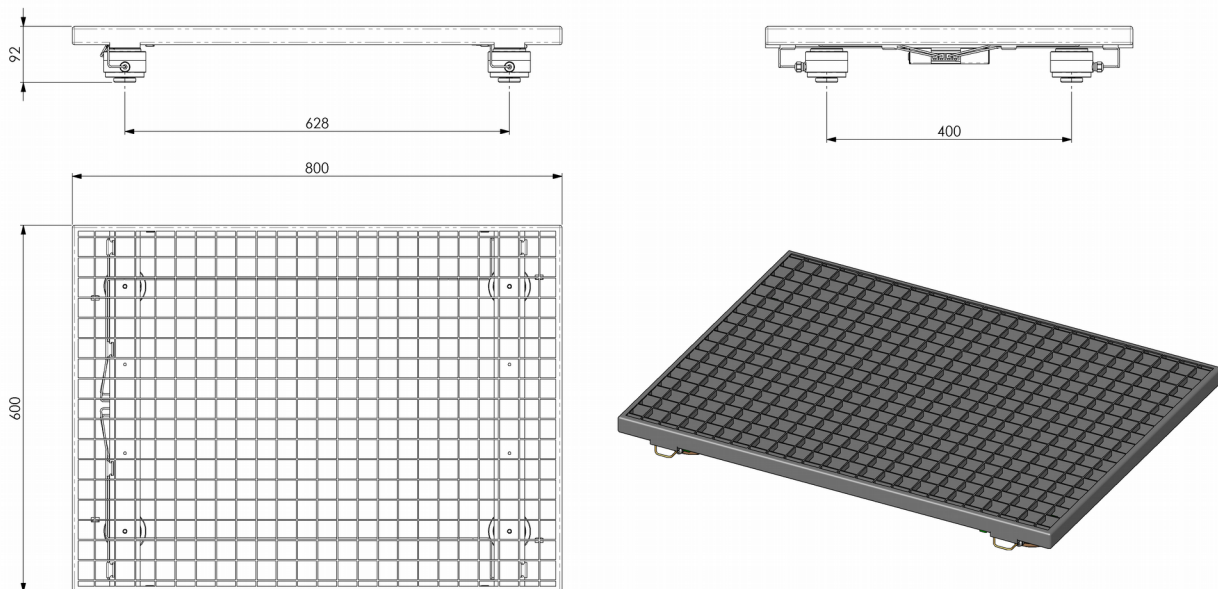

DIGI SENS Switzerland AG

Freiburgstrasse 65
CH – 3280 Murten
Switzerland

Tel. : +41 (0)26 672 98 76
Fax : +41 (0)26 672 98 79
sales@digisens.ch
www.digisens.ch