


Technical Data

| | | | | | |
|------------------------------------|----------------|---|---------------|--|---------------------|
| 1. Technical specifications | | Length | 800 mm | 3. Standards | |
| Number of containers | 1 pallet | Width | 600 mm | Relative Air Humidity | ≤98% not condensing |
| Capacity | 500 kg | Height to platform | 92 mm | Pollution degree | 2 |
| Overload Capacity | 100% | Weight | 13.4 kg | 4. Delivery Condition | |
| Combined deviation (typical) | ±0.5% f.s. | Indoor use | | Ready to use | |
| Resolution | 50 g | 2. Interface | | Delivered on 1/2 EURO-pallet, max. 10 pieces stacked per pallet | |
| Temperature drift (typical) | ±60 g/K | 2 wire RS-485 serial bus | | | |
| Zero point drift (typical) | +6 kg/year | LOWA DIGI SENS protocol (serial half-duplex ASCII protocol, no collision control) | | | |
| Power supply | 12V DC ± 2V DC | Connector | RJ45 (8 pins) | | |
| Power consumption | 30 mA (360 mW) | | | | |
| Functional temperature range | +5 to +40 °C | | | | |

Dimensional drawing

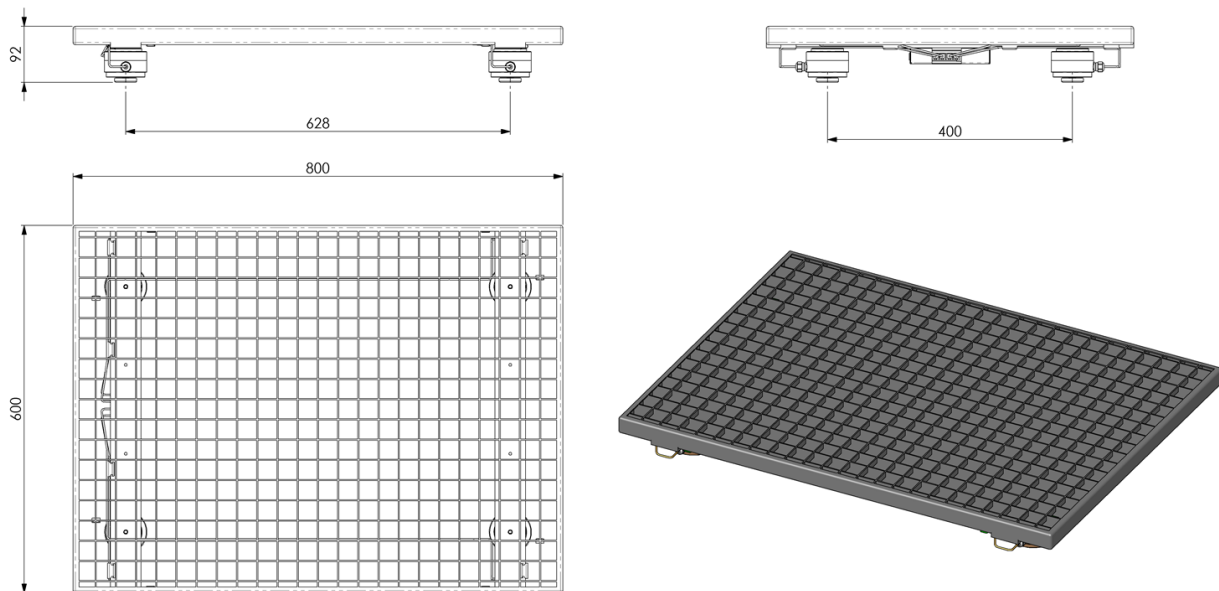

DIGI SENS Switzerland AG

Freiburgstrasse 65
CH – 3280 Murten
Switzerland

Tel. : +41 (0)26 672 98 76
Fax : +41 (0)26 672 98 79
sales@digisens.ch
www.digisens.ch