

e-nventory[®] shelf for 4 x 20kg containers (flat version)





Technical Data

1. Technical specifications Number of containers 4 Capacity 4 x 20 kg Overload Capacity 50% Max error ⁽¹⁾ ±10g ≤ 5 kg ±0.2% > 5kg Repeatability (typical) ±2 g Resolution 1 g Temperature drift (typical) ±1g/K Zero point drift (typical) -0.25% f.s./year Power supply 12V DC ± 2V DC Power consumption 30 mA (360 mW) Functional temperature range +5 to +40 °C	Length	996 mm	3. Standards Relative Air Humidity ≤98% not condensing Pollution degree 2 4. Delivery Condition Ready to mount in standard shelf Delivered on EURO-pallet, max. 30 pieces stacked per pallet
	Width	396 mm	
	Height	34 mm	
	Weight	10.1 kg	
	Indoor use		
	2. Interface 2 wire RS-485 serial bus LOWA DIGI SENS protocol (serial half-duplex ASCII protocol, no collision control)		
	Connector	RJ45 (8 pins)	

⁽¹⁾ Tested in the center and at room temperature

Dimensional drawing

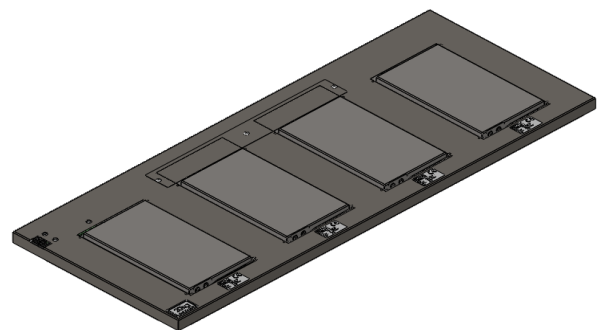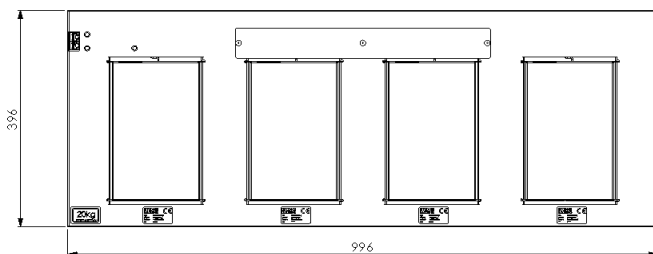

DIGI SENS Switzerland AG

Freiburgstrasse 65
CH – 3280 Murten
Switzerland

Tel. : +41 (0)26 672 98 76
Fax : +41 (0)26 672 98 79
sales@digisens.ch
www.digisens.ch